

LionFilter 200

Quick Installation Guide

- English _____ P.1-4
- 中文 _____ P.5-8
- 日本語 _____ P.9-12



LionFilter 200

Quick Installation Guide

1. Package Content
2. Descriptions of the Ports
3. Access Web GUI and Connect to the Network
4. LED Indicators




1

Package Content

- 1 LionFilter 200
- 2 Ethernet cable X1
- 3 Power adapter X1
- 4 QIG QRcode

2

Descriptions of the Ports

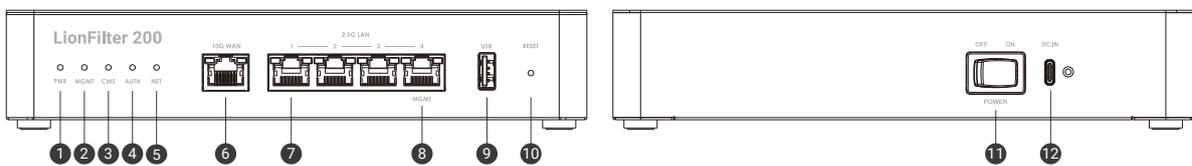


- 1 PWR (Power)
- 2 MGMT(Management)
- 3 CMS (Centrally managed)
- 4 AUTH (License)
- 5 NET (Internet)
- 6 WAN
- 7 8 LAN (1-4)
- 8 MGMT Port
- 9 USB
- 10 RESET
- 11 Power switch
- 12 DC IN


3

Access Web GUI and Connect to the Network


1. Plug the power cable into LionFilter 200. Turn on the power switch.
2. Connect the WAN port of LionFilter 200 to the LAN port of a modem / router / switch provided by the ISP or the IT administrator with an Ethernet cable.
3. Connect the MGMT port of LionFilter 200 to your PC/Laptop with another Ethernet cable. It will automatically assign an IP to your PC/Laptop via DHCP.

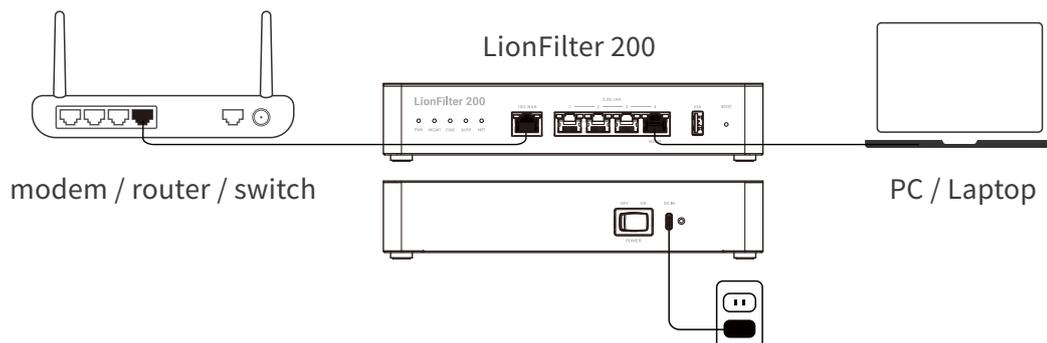


4. After getting the IP, open your PC/Laptop browser and go to <https://myfilter.lionic.com/>. Here you will see the LionFilter Login page.

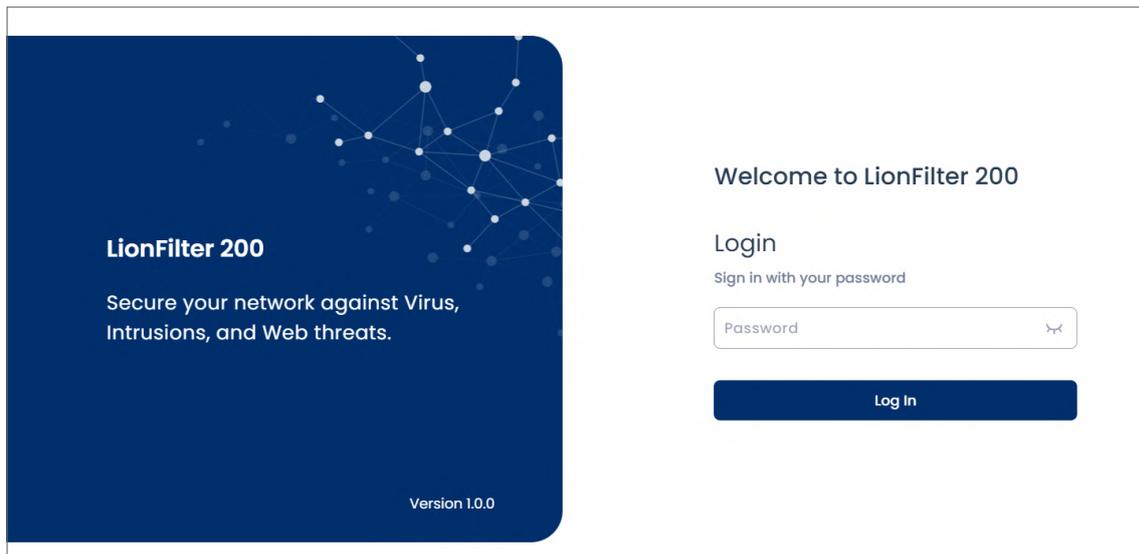


5. The default password for login is the Serial Number shown at the bottom of the product.
6. After logging in, set the network configuration of LionFilter 200 in [WAN] page.

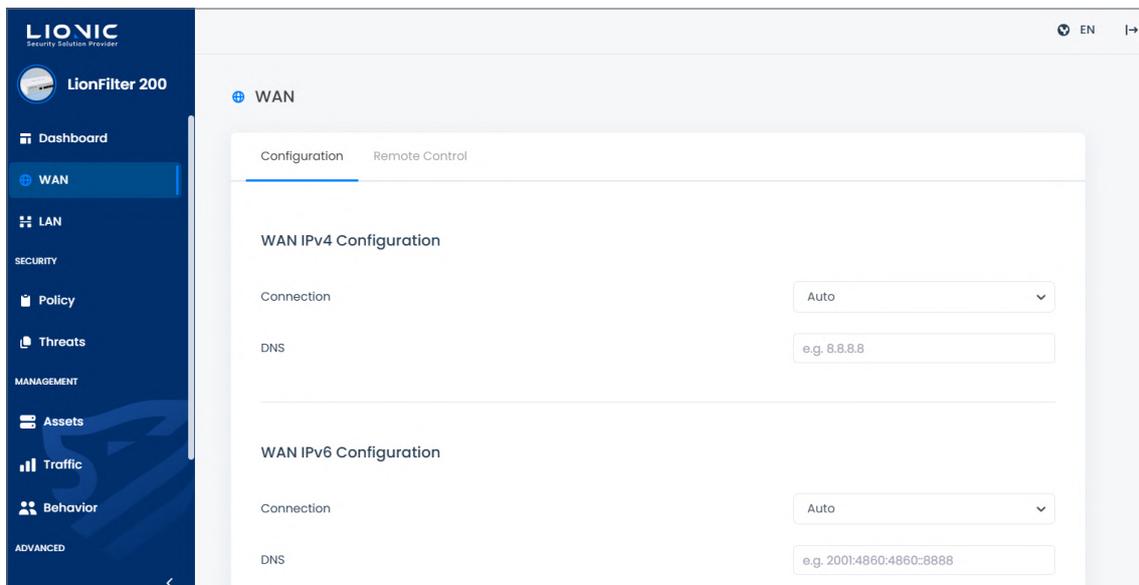

* Note: you can configure the MGMT port to be used as a regular LAN port. To do this, go to [System] > [Device] page and disable the MGMT port.

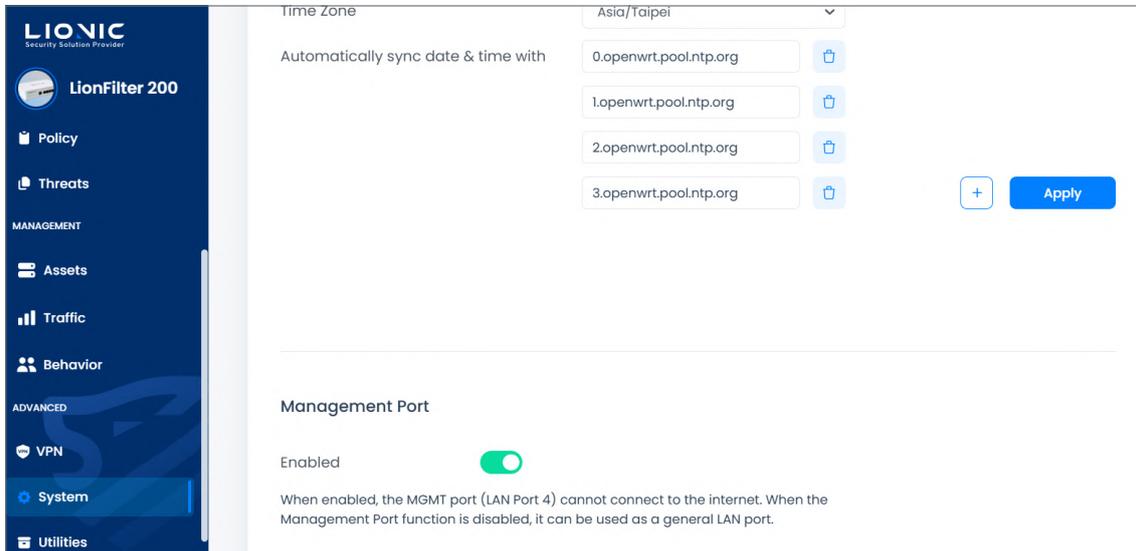

7. To keep the latest virus/intrusion/phishing/fraud detection and prevention, please buy the license key i.e. activation code and enter it in [System] > [Device] > [Activation Code] field. Then, click the 'Activate' button while the LionFilter 200 is connecting to the Internet to make the activation take effect.

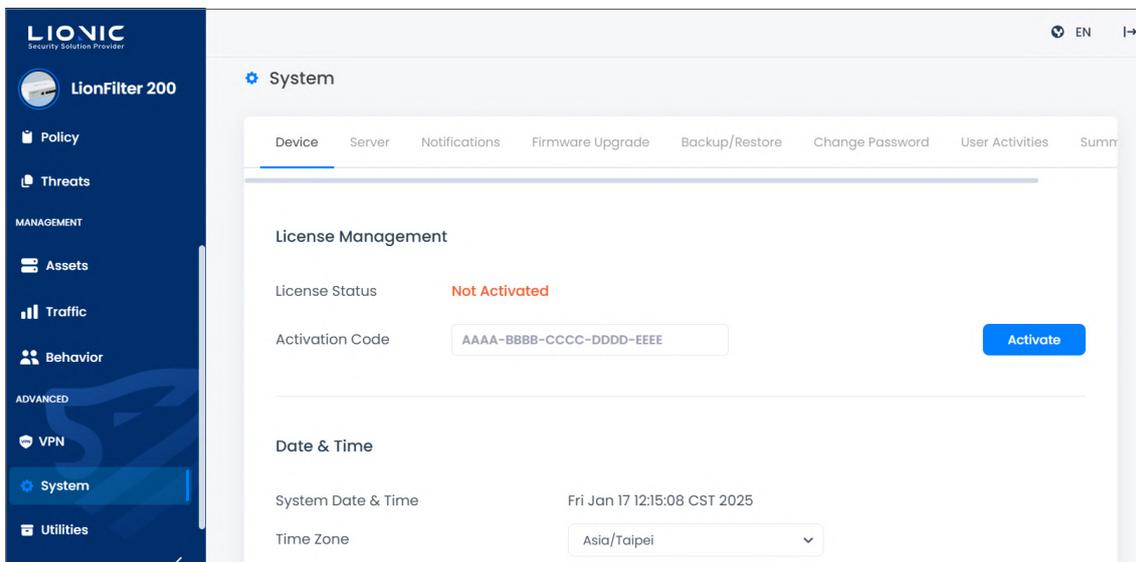

* Note : The activation code consists of 20 English letters and numbers. It can activate the license after applied successfully. Then the License Status will be displayed as Activated. If you do not receive the activation code when you purchase LionFilter 200 or the activation code is not working, please contact local sales representatives in your region.

The status of each LED indicator on LionFilter 200 is described as below:

LED Name	Status	Description
PWR	● Green LED is ON	Power is ON
	● OFF	Power is OFF
MGMT	● Green LED is ON	MGMT port used as management port
	● Green LED is blinking	Firmware upgrading
	● Red LED is blinking	Factory reset with the RESET button on the device
	● OFF	MGMT port used as LAN port
CMS	● Green LED is ON	Connected to CMS
	● Red LED is ON	CMS is set but cannot connect to CMS
	● OFF	CMS is not set
AUTH	● Green LED is ON	License is activated and valid
	● Green LED is blinking	Checking license status or check license status failed
	● Red LED is blinking	License will be expired in 30 days
	● Red LED is ON	License expired or not activated yet
NET	● Green LED is ON	System is ready and connected to Internet
	● Red LED is ON	System is ready but cannot connect to Internet
4 LEDs (MGMT,CMS, AUTH and NET)	● 4 Red LEDs are ON	System error

LionFilter 200

快速安裝指南

1. 產品內容
2. 機身及連接埠說明
3. 登入畫面指引
4. LED指示燈號說明




1

產品內容

- | | |
|------------------|---------------|
| 1 LionFilter 200 | 3 電源線 X1 |
| 2 網路線 X1 | 4 安裝指南 QRcode |

2

機身及連接埠說明

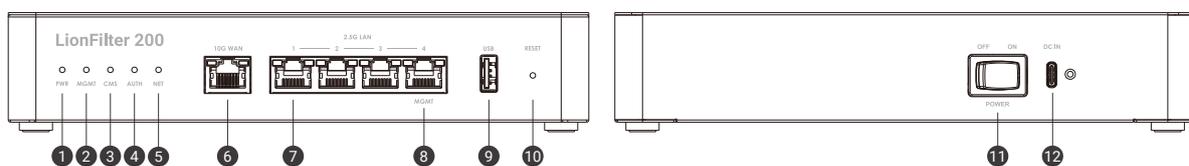


- | | | |
|-------------|-----------------|-----------|
| 1 電源指示燈 | 5 網際網路指示燈 | 9 USB埠 |
| 2 管理埠指示燈 | 6 外網連接埠 | 10 系統重置按鈕 |
| 3 中央控制系統指示燈 | 7 8 內網連接埠 (1-4) | 11 電源開關 |
| 4 授權指示燈 | 8 專用管理埠 | 12 DC IN |

3


登入畫面指引

- 將電源線插上 LionFilter 200後開啟電源。
- 將網路線的一端插入網路服務供應商提供的數據機網路連接埠或上層路由器/交換機的網路連接埠 (LAN)，另一端插入 LionFilter 200 的外網連接埠 (WAN)。
- 將另一條網路線一端插入 LionFilter 200 的專用管理埠(MGMT port)，另一端插入筆電/桌機的網路連接埠。DHCP Server會自動為您的筆電/桌機指派 IP 位址。

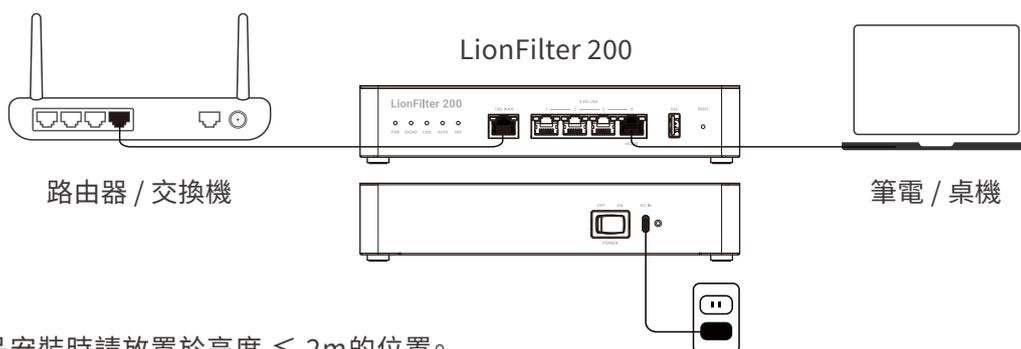

* 產品安裝時請放置於高度 ≤ 2m的位置。

4. 取得IP後，請使用網頁瀏覽器開啟<https://myfilter.lionic.com/>，此為 LionFilter 的網頁控制介面。

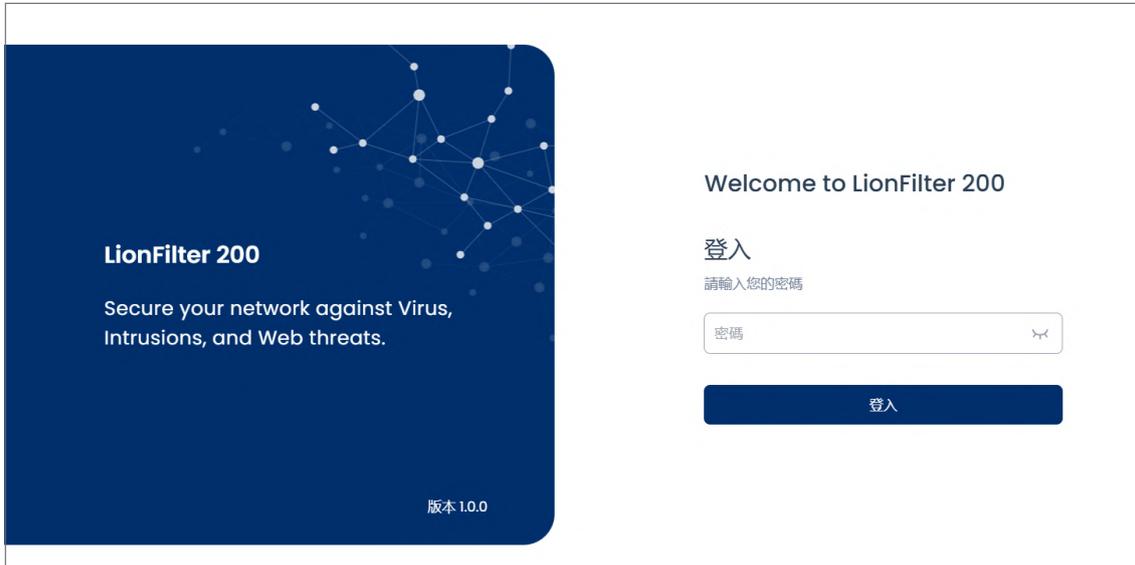


5. 網頁控制介面的預設密碼為產品標籤內的序號，產品標籤位於機身底部。


6. 登入後，請至 [網際網路] 頁面完成 LionFilter 200 的 IP 設定。



* 備註：設定完成後，若要將MGMT port 設定為一般LAN port 使用，可以在 [系統管理] > [裝置資訊] 頁面中，關閉專用管理埠功能。

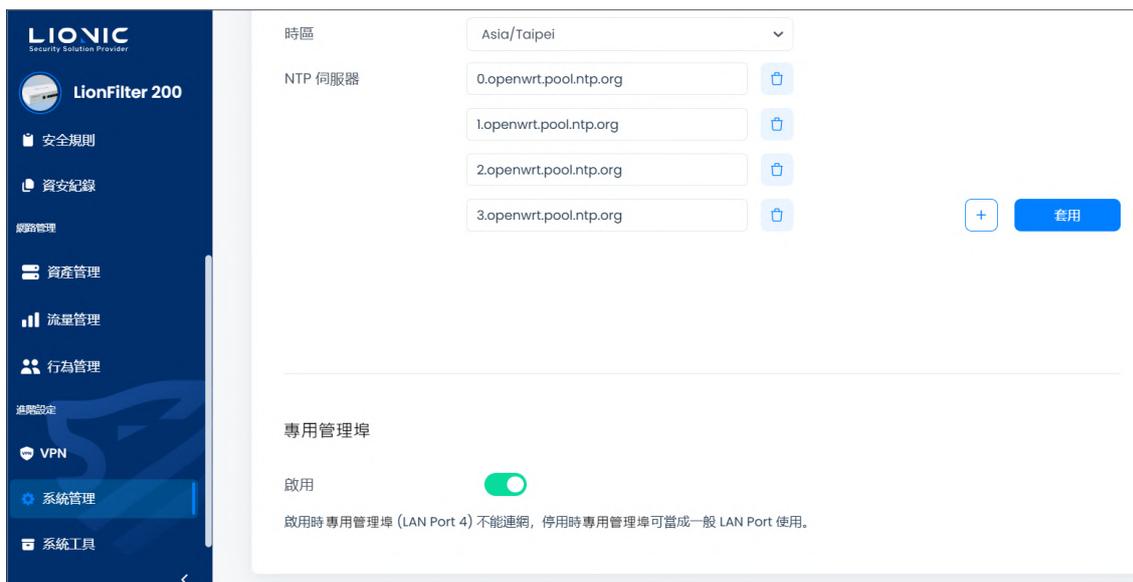

7. 為了能檢測最新的病毒/惡意入侵/釣魚網站/詐騙網站,獲得完整的資安防護功能,請購買授權金鑰(即授權啟用碼)。將其輸入到 [系統管理]>[裝置資訊]>[啟用碼] 欄位中。在 LionFilter 200 連接至網際網路的環境下,點擊 [啟用]以完成啟用。

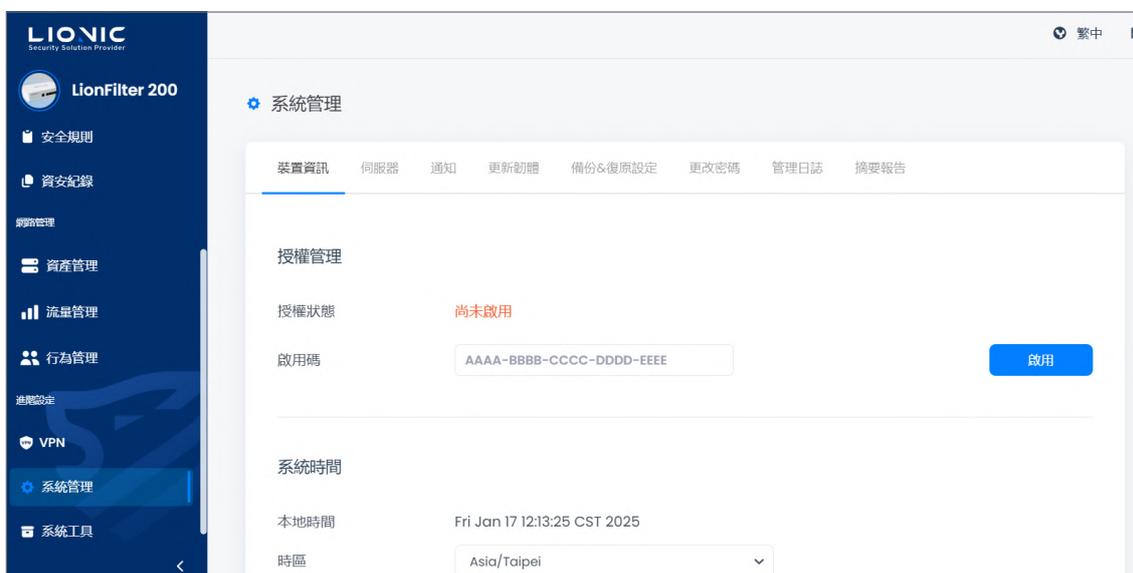

*備註:授權啟用碼由 20 位英文與數字組成,成功套用後可以啟用授權。若您沒收到授權啟用碼或啟用碼異常,請聯繫當地經銷商或銷售代表。

LionFilter 200 機身及連接埠 LED 指示燈號狀態說明如下：

指示燈號	燈號行為	狀態說明
PWR (電源)	● 綠燈恆亮 ● 燈號熄滅	電源開啟 未接電源
MGMT (專用管理埠)	● 綠燈恆亮 ● 綠燈閃爍 ● 紅燈閃爍 ● 燈號熄滅	MGMT port做為專用管理埠使用 韌體更新中 使用裝置上的RESET按鈕回復原廠設定 MGMT port做為一般LAN Port使用
CMS	● 綠燈恆亮 ● 紅燈恆亮 ● 燈號熄滅	成功連至 CMS 有設定但無法連至 CMS 未設定 CMS
AUTH (授權)	● 綠燈恆亮 ● 綠燈閃爍 ● 紅燈閃爍 ● 紅燈恆亮	授權有效 授權狀態確認中或無法確認 授權將在 30 天內過期 授權未啟用或授權過期
NET (網際網路)	● 綠燈恆亮 ● 紅燈恆亮	系統開機完成且成功連至網際網路 系統開機完成但無法連至網際網路
4 LEDs (MGMT,CMS, AUTH and NET)	● 4顆紅燈恆亮	系統異常

LionFilter 200

クイックインストールガイド

1. 内容
2. 各ポート説明
3. 管理画面へのアクセスとネットワークへの接続方法
4. LEDインジケータ




1

内容

- ① LionFilter 200
- ② イーサネットケーブル x1
- ③ 電源アダプター x1
- ④ クイックガイドQRコード

2

各ポート説明

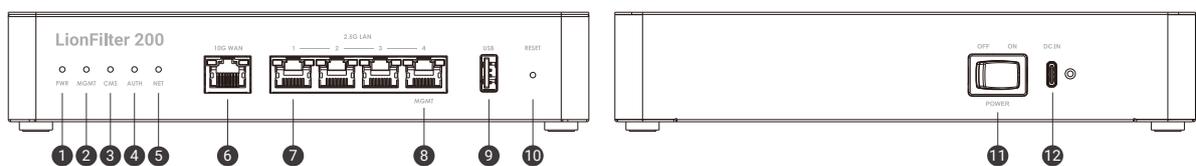


- ① 電源
- ② MGMT(マネジメント)
- ③ CMS
- ④ ライセンス
- ⑤ インターネット
- ⑥ WANポート
- ⑦ ⑧ LANポート(1-4)
- ⑧ マネジメントポート
- ⑨ USBポート
- ⑩ リセット
- ⑪ 電源スイッチ
- ⑫ DC電源入力

3

管理画面へのアクセスとネットワークへの接続方法

1. LionFilter 200を電源に接続して、電源スイッチをONにしてください。
2. LionFilter 200のWANポートとISPから提供されたルーターのLANポートをイーサネットケーブルで接続してください。
3. LionFilter 200のマネジメントポート(MGMT)とパソコンまたはノートパソコンをイーサネットケーブルで接続してください。DHCPで自動的にパソコンまたはノートパソコンにIPアドレスを割り当てます。

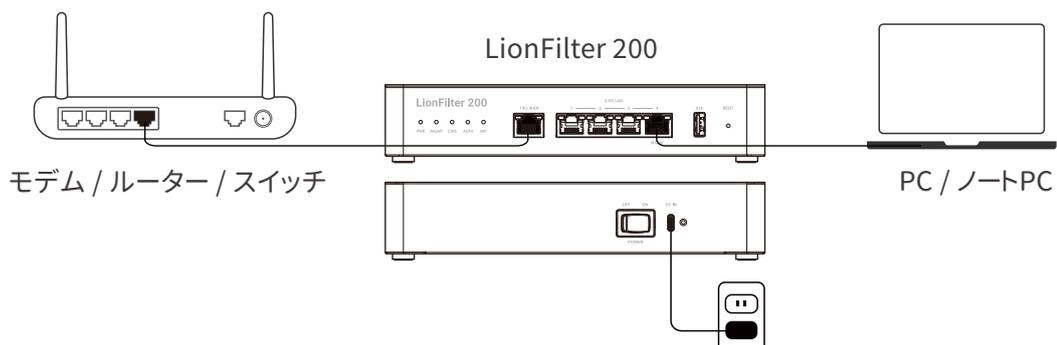


4. IPアドレスを取得した後、パソコンまたはノートパソコンにてウェブブラウザを開いて、<https://myfilter.lionic.com/>にアクセスしてください。



5. ログインのデフォルトのパスワードはデバイスの裏側に記載されているS/N番号です。
6. ログインした後、[WAN]のページでLionFilter 200のネットワーク設定をしてください。



* 付記: 設定完了後、マネジメントポートをLANポートとして使用する場合、[システム] > [デバイス]のページでマネジメントポートを無効にしてください。

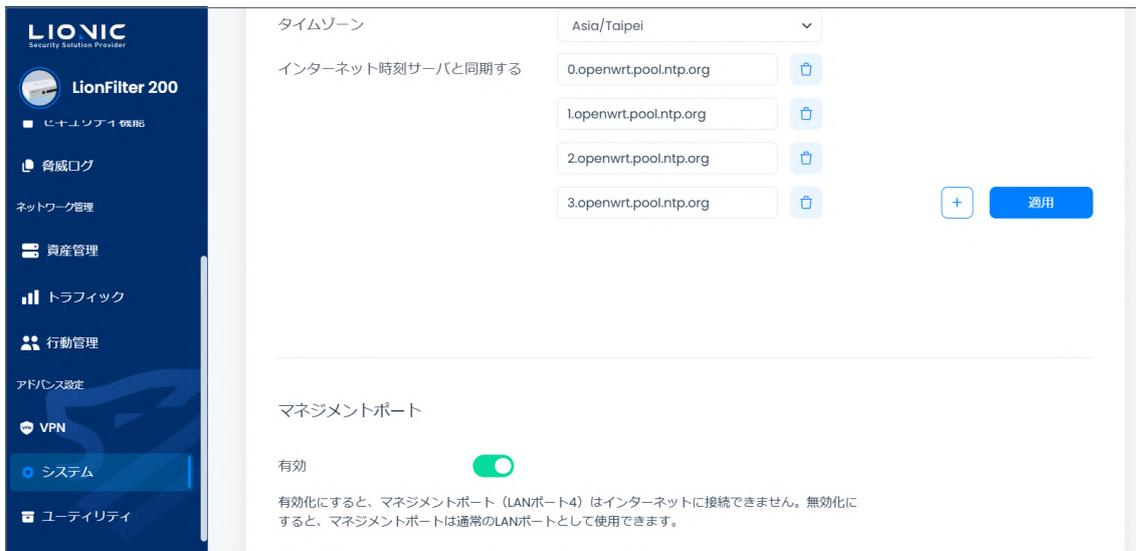

7. 最新のウイルス、侵入、フィッシング、詐欺検出および防止機能を利用するために、ライセンスキー(アクティベートコード)を購入し、LionFilter 200がインターネットに接続されている状態で、[システム] > [デバイス] > [アクティベートコード]のフィールドに入力し、「アクティベートする」をクリックすると、ライセンスが有効になります。



* 付記: アクティベートコードは、半角英数字20文字で構成されています。適用に成功すると、ライセンスが有効になります。アクティベートコードが無い場合やアクティベートできない場合、ご購入の窓口にご連絡ください。

LionFilter 200 の各LEDインジケータの状態を以下に示す：

LED名	状態	説明
PWR	● 緑LED点灯 ● LED OFF	電源ON状態 電源OFF状態
MGMT	● 緑LED点灯 ● 緑LED点滅 ● 赤LED点滅 ● LED OFF	マネジメントポートとして使用する ファームウェアのアップグレード中 リセットボタンでリセットしている Lanポートとして使用する
CMS	● 緑LED点灯 ● 赤LED点灯 ● LED OFF	CMSに接続済み CMSは設定済みが接続ができない CMSが設定されていない
AUTH	● 緑LED点灯 ● 緑LED点滅 ● 赤LED点滅 ● 赤LED点灯	ライセンス有効 ライセンス確認中もしくはライセンス確認失敗 30日以内にライセンス有効期限切れ ライセンス未アクティベート状態もしくは期限切れ
NET	● 緑LED点灯 ● 赤LED点灯	システム稼働中とインターネットネットに接続中 システム稼働中だが、インターネットネットに接続してない
4 LEDs (MGMT,CMS, AUTH and NET)	● 四つの赤LED点灯	システム異常